


NOTES:

1. JOINTS SHALL BE FORMED AT RIGHT ANGLES TO THE ALIGNMENT OF THE SIDEWALK AND TO THE DEPTHS INDICATED BELOW.
2. THE SIDEWALK SHALL BE MARKED OFF INTO SQUARE STONES BY CONTRACTION JOINTS. CONTRACTION JOINTS SHALL BE ONE-EIGHTH (1/8) INCH WIDE BY (1) INCH DEEP AND SHALL BE FORMED BY TOOLING.
3. EXPANSION JOINTS SHALL BE FORMED BY A ONE-HALF (1/2) INCH THICK PREFORMED JOINT FILLER, EXTENDING THE FULL DEPTH OF THE SLAB, AND SECURED SO THAT THEY ARE NOT MOVED BY DEPOSITING AND COMPACTING THE CONCRETE AT THESE JOINTS. 3/4" JOINT FILLER WILL BE USED WHEN SPACING EXCEEDS 100'.
4. EXPANSION JOINTS SHALL BE PLACED WHERE SIDEWALK ABUTS OTHER STRUCTURES AND SHALL NOT BE SPACED MORE THAN 50 FEET APART ON STRAIGHT RUNS FOR HAND LAID SIDEWALK AND NOT MORE THAN 200 FEET APART ON STRAIGHT RUNS FOR MACHINE LAID SIDEWALKS.

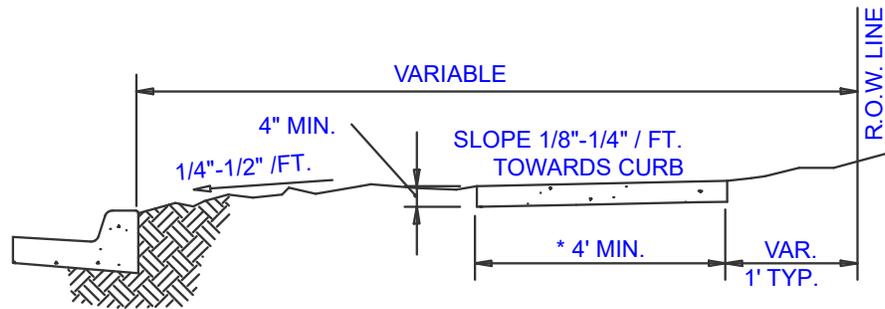

NOTE: 1/4"/FT. PREFERRED

\* 5' SIDEWALKS REQUIRED ALONG ALL ARTERIAL STREETS.

GARDNER, KANSAS <u>PUBLIC</u> <u>WORKS/</u> <u>ENGINEERING</u> <u>DIVISION</u>	APPROVED	REVISED	SIDEWALK DETAIL	STANDARD DETAIL 21-4
	JRH CITY ENGINEER	5/01/07		
	2-1-07 DATE			