



SECTION B-B

NOTE:
THROAT AND THROAT
WALL SHALL BE POURED
MONOLITHIC.

MANHOLE RING AND LID SHALL BE
CLAY & BAILEY NO. 2020 OR DEETER
2016 (185 LBS.) OR AN APPROVED
EQUAL.
4'-0" MIN.

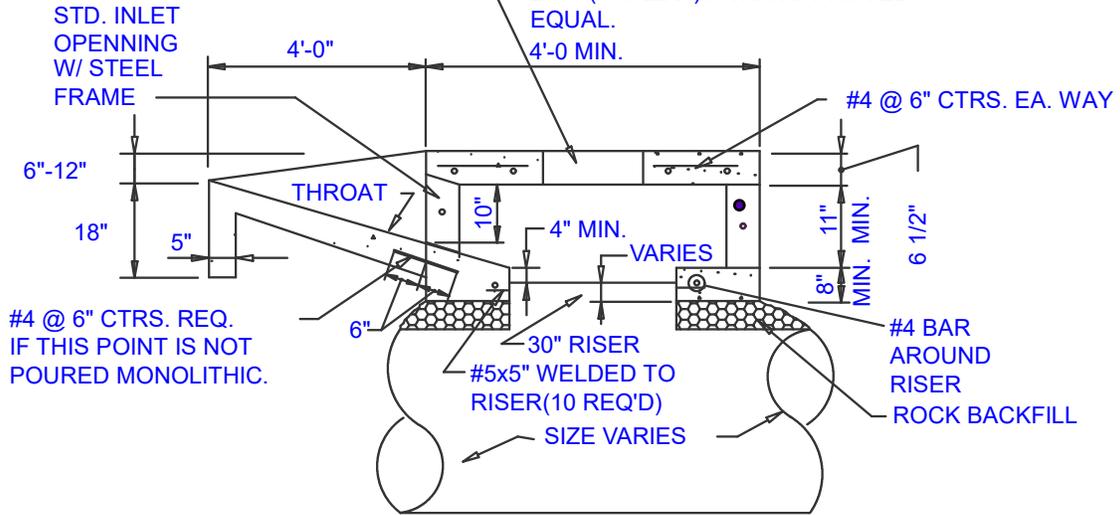

SECTION A-A

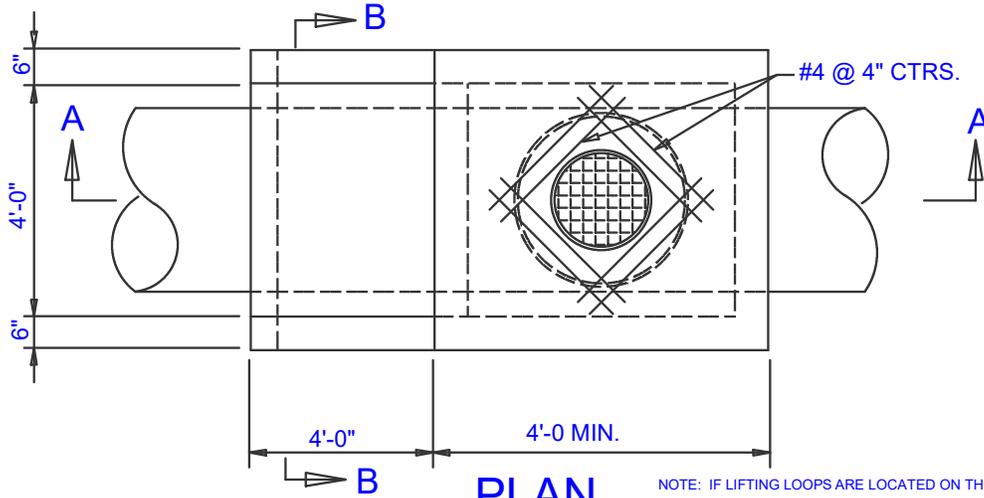

PLAN

NOTE: IF LIFTING LOOPS ARE LOCATED ON THE TOP OF
THE PRECAST INLET TOPS, A MINIMUM OF 2" COVER IS
REQUIRED OVER THE LIFTING LOOPS.

GARDNER, KANSAS PUBLIC WORKS/ ENGINEERING DIVISION	APPROVED	REVISED	YARD INLET DETAIL	STANDARD DETAIL 40-4
	JRH CITY ENGINEER			
	2-1-07 DATE			