


EMBEDDING DETAIL

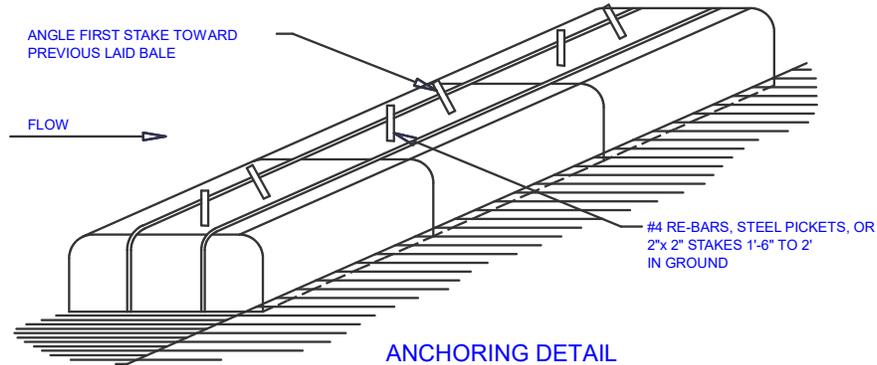

ANCHORING DETAIL

HAY BALE DETAIL

(Not to Scale)

1. BALES SHALL BE PLACED IN A ROW WITH ENDS TIGHTLY ABUTTING THE ADJACENT BALES.
2. EACH BALE SHALL BE EMBEDDED IN THE SOIL A MINIMUM OF 4".
3. BALES SHALL BE SECURELY ANCHORED IN PLACE BY STAKES OR RE-BARS DRIVEN THROUGH THE BALES. THE FIRST STAKE IN EACH BALE SHALL BE ANGLED TOWARD PREVIOUSLY LAID BALE TO FORCE BALES TOGETHER.
4. INSPECTION SHALL BE FREQUENT AND REPAIR OR REPLACEMENT SHALL BE MADE PROMPTLY AS NEEDED.
5. BALES SHALL BE REMOVED WHEN THEY HAVE SERVED THEIR USEFULNESS SO AS NOT TO BLOCK OR IMPEDE STORM FLOW OR DRAINAGE BY THE OWNER.

GARDNER, KANSAS PUBLIC WORKS/ ENGINEERING DIVISION	APPROVED	REVISED	EROSION CONTROL HAY BALE DETAIL	STANDARD DETAIL 73-2
	<u>JRH</u> CITY ENGINEER	_____		
	2-1-07 DATE	_____		
