


NOTE:
SILT FENCE LOCATED ALONG THE PROJECT BOUNDARIES
SHALL BE INSTALLED PRIOR TO GRADING OPERATIONS

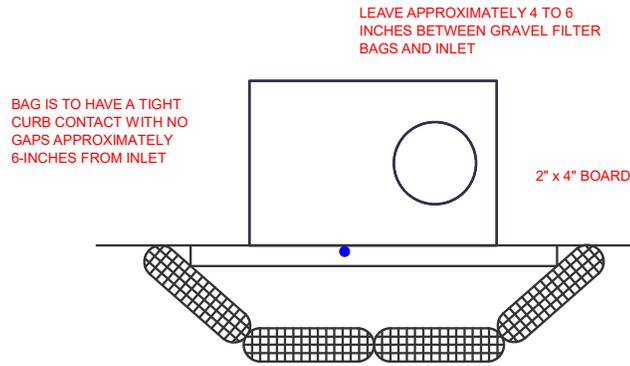


3/4-INCH GRAVEL CONTAINED IN PERVIOUS
BURLAP BAGS OR SYNTHETIC NET BAGS
(1/8-INCH MESH) APPROXIMATELY 24 INCHES
LONG, 12 INCHES WIDE, AND 6 INCHES
(i.e. CURB HEIGHT) HIGH.

PLACE GRAVEL FILTER
BAGS SUCH THAT NO
GAPS ARE EVIDENT

TOP VIEW

GRAVEL FILTER BAGS

(Typical At Every Inlet)
(Not to Scale)

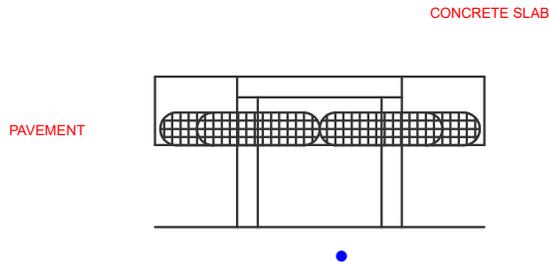

HEIGHT OF GRAVEL
FILTER BAGS SHOULD
NOT BE ABOVE THE
CONCRETE WALK

PLACE GRAVEL FILTER
BAGS SUCH THAT NO
GAPS ARE EVIDENT

FRONT VIEW

NOTE:
AFTER CONSTRUCTION OF INLETS, FILTER BAGS SHALL BE PLACED
AROUND PROPOSED INLETS.

<p>GARDNER, KANSAS <u>PUBLIC</u> <u>WORKS/</u> <u>ENGINEERING</u> <u>DIVISION</u></p>	APPROVED	REVISED	<p>EROSION CONTROL GRAVEL FILTER BAG</p>	<p>STANDARD DETAIL 73-3</p>
	JRH	_____		
	CITY ENGINEER	_____		
	2-1-07	_____		
	DATE			